



DC22-12 (12V22Ah)



DC (Deep Cycle) series is specially designed for frequent deep cycle discharge. By using the specially designed active material and strong grids, the DC series battery offers reliable performance in high load situations and can deliver more than 300 cycles at 100% DOD. Suitable for mobility scooters, electric wheel chairs, golf buggies etc.



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	22.0Ah@20hr-rate to 1.75V per cell @25°C 18.0Ah@2hr-rate to 1.75V per cell @25°C
Weight	Approx. 6.2 Kg(Tolerance $\pm 3\%$)
Max. Discharge Current	220 A (5 sec)
Internal Resistance	Approx. 14 m Ω
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C $\pm 5^\circ\text{C}$
Float charging Voltage	13.7 to 13.9 VDC/unit Average at 25°C
Recommended Maximum Charging Current	6.6 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	VMF Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F3/F13
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.




Dimensions

Unit: mm Dimension: 181(L) \times 77(W) \times 167(H)



Terminal F3 or F13



Constant Current Discharge Characteristics: A(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	106.1	63.09	50.24	29.58	17.43	9.830	6.920	5.348	4.424	2.861	2.373	1.240
10.0V	102.1	60.99	48.80	28.86	17.07	9.640	6.797	5.255	4.348	2.814	2.335	1.220
10.2V	97.02	58.29	46.92	27.88	16.55	9.375	6.617	5.118	4.236	2.743	2.277	1.190
10.5V	88.38	53.97	44.00	26.40	15.80	9.000	6.363	4.928	4.082	2.645	2.199	1.150
10.8V	79.62	49.59	41.04	24.92	15.05	8.620	6.110	4.735	3.928	2.548	2.121	1.110
11.1V	70.14	44.67	37.64	23.18	14.16	8.170	5.803	4.503	3.738	2.429	2.024	1.060

Constant Power Discharge Characteristics: W(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	1048	691.9	572.3	349.1	192.4	117.8	81.45	63.18	52.26	33.46	29.24	15.95
10.0V	1027	691.2	561.9	341.6	191.5	117.4	81.29	62.81	51.99	33.35	28.97	15.38
10.2V	993.7	670.4	550.9	339.4	190.3	116.9	80.98	62.30	51.72	33.25	28.69	15.10
10.5V	909.5	642.8	522.4	332.8	187.8	116.2	80.65	61.65	51.46	33.13	28.40	14.53
10.8V	812.8	601.3	493.6	326.6	184.2	115.6	80.12	61.32	51.15	33.00	27.80	13.94
11.1V	715.8	559.8	465.1	316.9	179.8	114.3	79.27	59.68	50.84	32.86	27.50	13.67


All mentioned values are average values (Tolerance $\pm 2\%$).

DC22-12


12V22Ah



Life characteristics of cyclic use

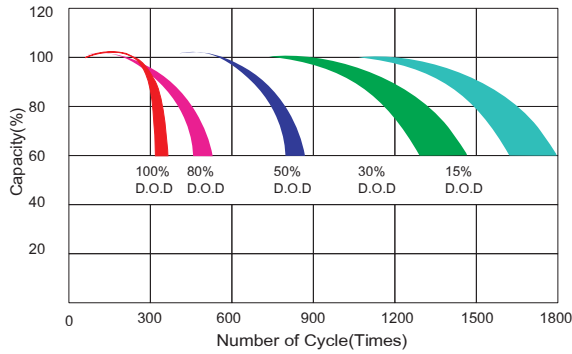

Storage characteristic

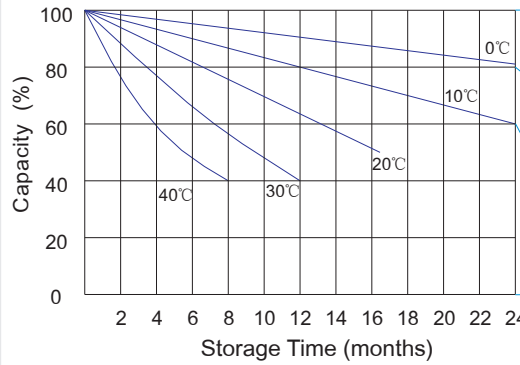


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is requires)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.

Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached


Supplementary charge and storage guidelines

Charge characteristic Curve for standby use

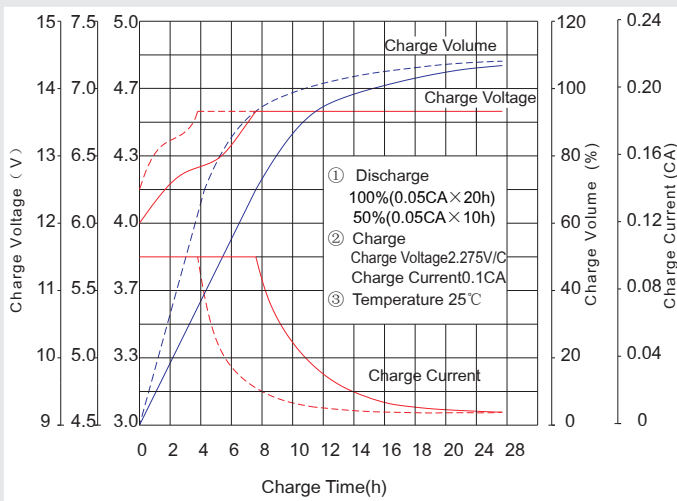

- ① Discharge 100%(0.05CA×20h) 50%(0.05CA×10h)
- ② Charge Charge Voltage2.275V/C Charge Current0.1CA
- ③ Temperature 25°C

Discharge characteristic Curve

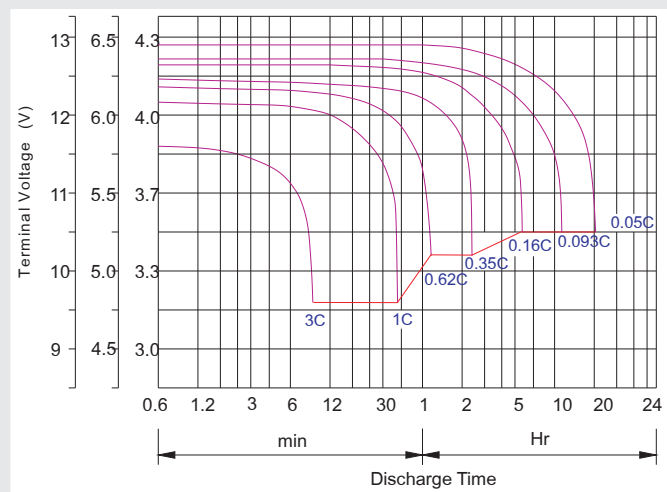

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V /cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤0.2C	0.2C < (A) < 1.0C	(A) ≥1.0C

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.3Cx4h

Bolt	M5	M6	M8
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6-7N-m	8-10N-m	10-12N-m

Maintenance & Cautions

Cycle service

- ※ Avoid battery over discharge, especially battery series connection use.
- ※ Charged with recommend voltage, ensure battery can be full recharged.
- In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
- ※ There are a number of factors that will affect the length of cyclic service.
- The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
- Generally speaking, the most important factors is depth of discharge.